


CSL0104

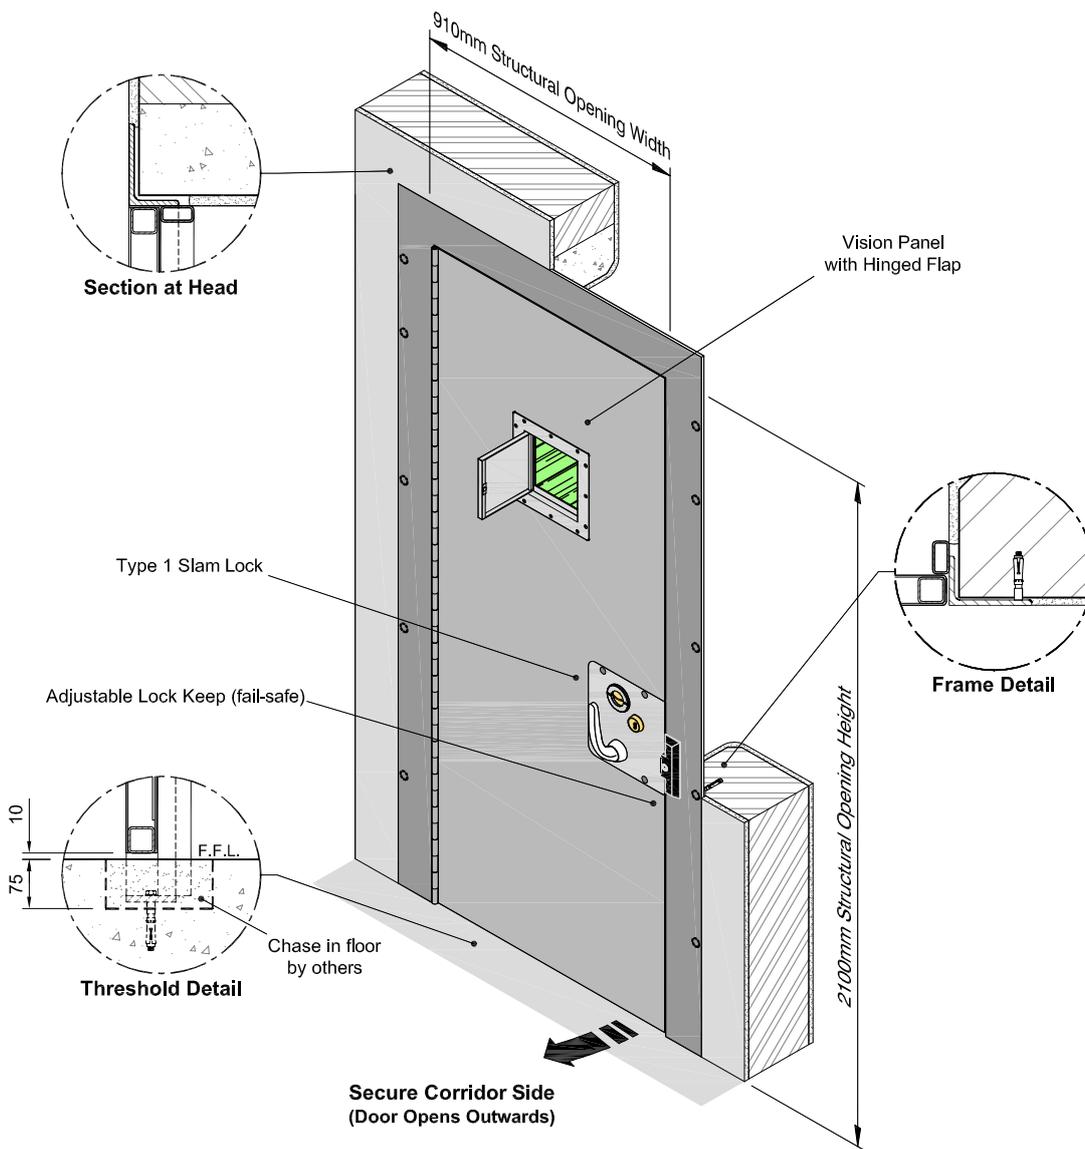

Specification


- Door panel constructed from 40mm wide rolled hollow steel sections with 3mm thick steel door skins.
- Mineral wool insulation to all internal voids.
- 125mm x 75mm x 8mm rolled steel angle frame with 50mm x 25mm steel rebates.
- Frame fixed into the structural opening with concealed 12mm dia sleeve anchors.
- Door panel mounted within door frame and hung on a substantial continuous hinge.
- Reinforcing plates to inside of door panel on cell side up to the height of the lock.
- Home Office Type 1 slam action lock with adjustable keep.
- 150mm x 150mm x 21mm thick physical attack laminated glass vision panel with hinged steel cover.

Finish

- One coat factory applied high build zinc phosphate primer to all mild steel surfaces.

Options

- Gasket free circular spy hole with swivel cover.
- Service hatch.



CSL0104