

Washbasin - Recessed Hand Rinse

CSL0947

Specification


- Constructed from grade 304 stainless steel, the faceplate is 2mm thick and the basin / receptacle is 1.5mm thick.
- All edges of the faceplate are chamfered to avoid ligature attachment.
- Concealed spray head.
- 1" 1/4 BSP male waste outlet connector welded to the underside of the basin.
- Fully concealed fixings with 4 off M12 x 150 long bolts (for walls up to 118mm thick).
- CSL0947E is provided with an electrical button plus a solenoid valve.
- CSL0947M is provided with a mechanical timed flow push button valve.

**Finish**

- Satin polished stainless steel.

Options

- CSL0947E for Electrical operation.
- CSL0947M for Mechanical operation.
- Grade 316 stainless steel available to order.

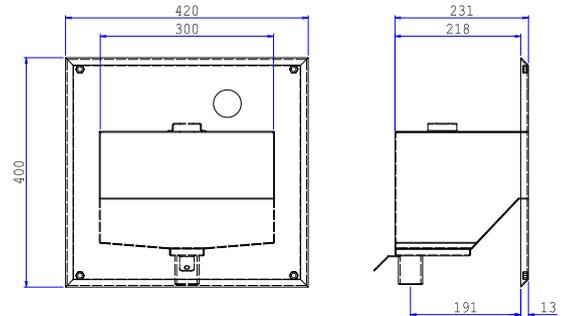

NOTE - This product requires temperature controlled water supply (CSL0976).
CSL0947E requires an electronic control unit (CSL0986B or CSL0986D).

Washbasin - Recessed Hand Rinse with Drinking Water

CSL0948

Specification


- Constructed from grade 304 stainless steel, the faceplate is 2mm thick and the basin / receptacle is 1.5mm thick.
- All edges of the faceplate are chamfered to avoid ligature attachment.
- Concealed spray head x 2.
- 1" 1/4 BSP male waste outlet connector welded to the underside of the basin.
- Fully concealed fixings with 4 off M12 x 150 long bolts (for walls up to 118mm thick).
- CSL0948E is provided with an electrical button x 2 plus solenoid valve x 2. CSL0948M is provided with a mechanical timed flow push button valve x 2.

**Finish**

- Satin polished stainless steel.

Options

- CSL0948E for Electrical operation.
- CSL0948M for Mechanical operation.
- Grade 316 stainless steel available to order.

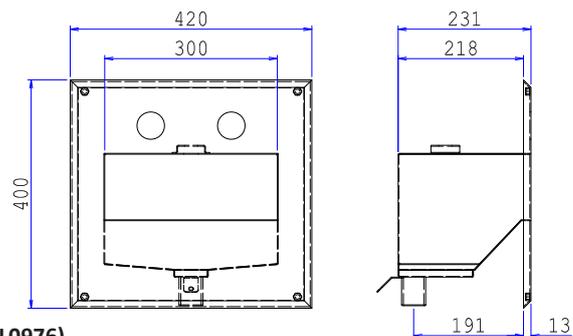

NOTE - This product requires temperature controlled water supply (CSL0976).
CSL0948E requires an electronic control unit (CSL0986B or CSL0986D).

Recessed Hand Rinse Dry Cell Cover

CSL0949

Specification

- A unique robust tamper resistant recessed hand rinse dry cell cover.
- Transforms a normal cell into a dry cell to prevent the disposal of contraband.
- Ergonomically designed to reduce ligature risks.
- Easy fitment with only a single tamper proof security fixing.
- Installation / removal tool included.
- Compatible with CSL0947 & CSL0948.

Finish

- Polyester powder coated.
- Stainless steel tamper proof security fixing.

