


CSL0307

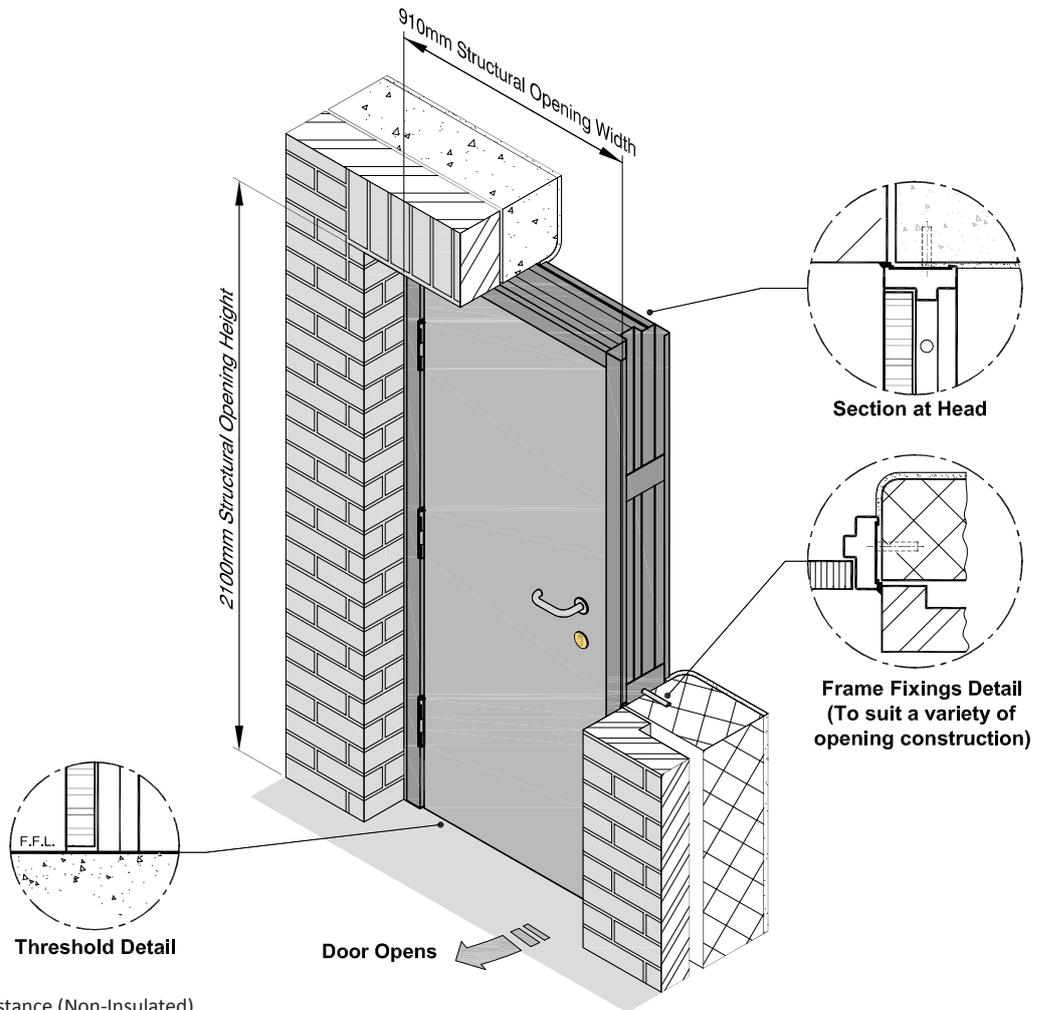

- CSL0307A - 240 minute Fire Resistance (Non-Insulated)
- CSL0307B - 240 minute Fire Resistance LPS SR2
- CSL0307C - 240 minute Fire Resistance LPS SR3
- CSL0307D - 240 minute Fire Resistance LPS SR4

Specification


- Door leaf constructed from 1.2mm thick zinc coated steel skins bonded to a honeycomb or rigid thermally-insulating core.
- Door leaf is mounted within a 1.6mm thick zinc coated steel double rebate frame and is hung from 3 or 4, stainless steel, ball bearing butt hinges.
- Reinforcing fitted within the door frame to suit various ironmongery options. "T" section astragal provided on double doors. 2.5mm heavy duty reinforcing channel incorporating an adjustable bottom rail allowing 16mm of height adjustment for uneven floors or smoke control purposes on fire resisting doors.
- Additional locking functions, attack skins and reinforcing on Gold and Silver doors.

Finish

- One coat factory applied primer.

Options

- Special frame to give up to 50mm width adjustment.
- 1.1/2 pairs or double leaf door sets.
- Over / side panels.
- Anti-ligature hardware.
- Threshold.
- Square / rectangular / circular window.
- Weather / smoke seals.
- Louvres.
- Factory finished to any B.S. or RAL colour.



CSL0307